



Breaking the rules



8.2025




naggura'n



naggura.com



Dimensions and Functions

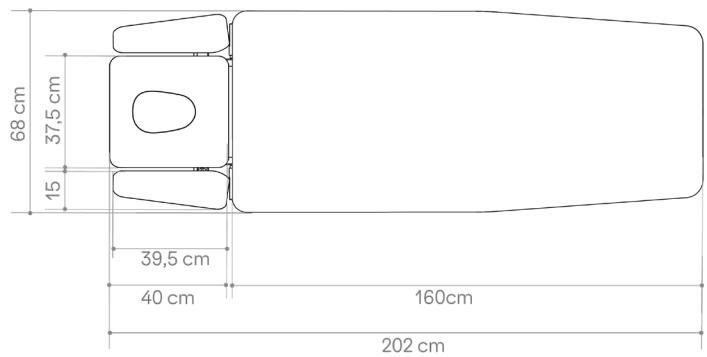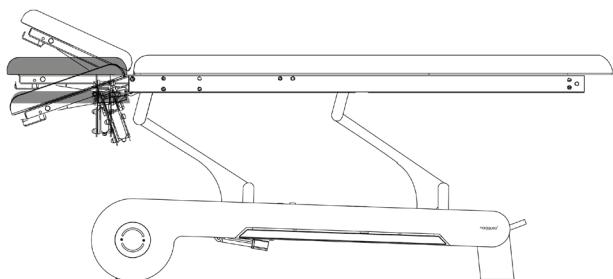

General Specifications

MOTOR

1 engine height (6000 N)

HEIGHT ADJUSTMENT

-/+ 59/95 cm

WEIGHT

155 kg

LIFTING CAPACITY

250 kg

POWER SUPPLY

AC100 – 120V, 50/60 Hz

AC220 – 240V, 50/60 Hz

INSULATION CLASS

Reinforced insulation II

PRODUCT CLASSIFICATION

Class I Equipment

APPLIED PARTS

Type B

MOISTURE RESISTANCE

IPX0

CONFORMITY

IEC 60601-1:2005 , IEC 60601-1:2005/AMD1:2012

EN 60601-1-2:2015 , IEC 60601-1-6:2010

IEC 60601-1-6:2010/AMD1:2013 , ISO 10993-10:2010

ISO 10993-5:2009

FRAME COLOUR

RAL 7047 + RAL 7011

FEEDER CABLE

3m, White

Upholstery

7cm

Wood base 1,5 cm + 4cm 120kg/m³ + 1,5cm 40kg/m³

Upholstery with straight edges and finished with a saddle stitch.

Coating: 100% vinyl. Against germs and bacteria (ISO 22196:2011).

Superior abrasion resistance: >150K cycles.

Flame retardancy: BS 5852

 Colour: Graphite

Operation

TwinLift® arm supports: stepless and simultaneously adjustable with gas spring. No collision with the therapist.

Head section with 2 gas springs.

B'Soft headrest and armrests: high-tech headsection and nose-pin in single density foam. Seamless and soft.

Fully integrated peripheral switch, easy access from all sides of the table.

4 wheels turning 360°. Fully integrated system underneath the base frame. 2 levers lift the table on its 4 wheels.

Heating: Cushion heating with XL heating elements. White LED light in the under carriage

Safety

Safety switch with key (power off).

Double tip system with automatic standby system (5 sec), for all motors.

Warranty

3 years on table and upholstery.

Accessories

3 models of stools, 2 colours



Paper roll holder



Bed covers, 2 colours

