



Breaking the rules



8.2025







naggura'n



naggura.com



Dimensions and Functions

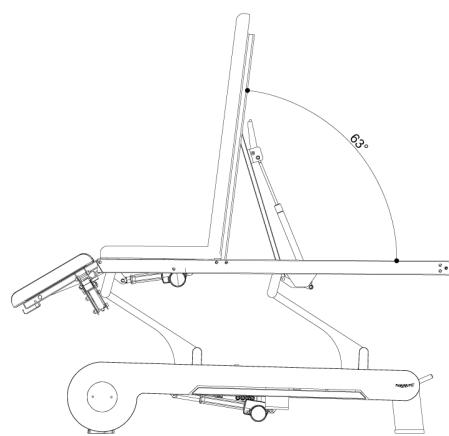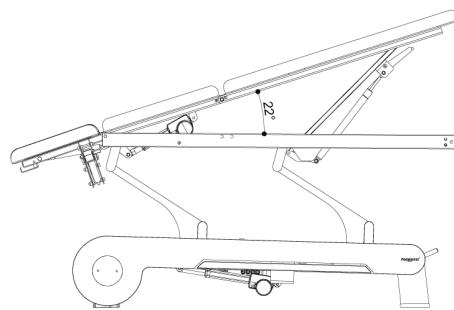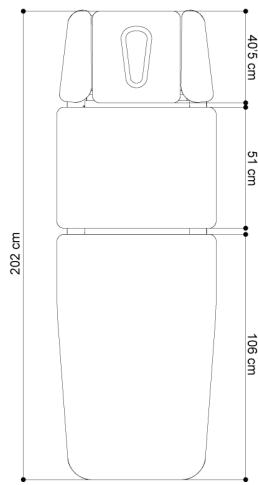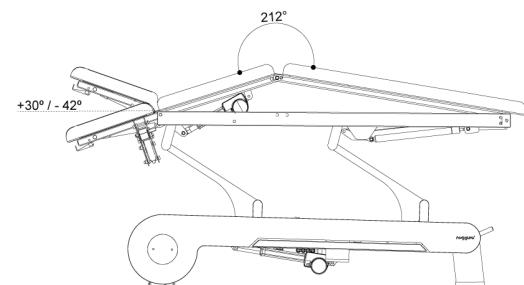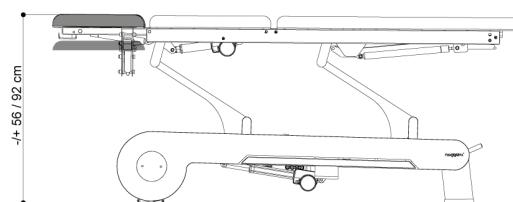

General Specifications

MOTORS

1 engine height (6000 N)

1 motor middle section (6000 N)

HEIGHT ADJUSTMENT

-/+ 56/92 cm

WEIGHT

148'5 kg

LIFTING CAPACITY

250 kg

POWER SUPPLY

AC100 – 120V, 50/60 Hz

AC220 – 240V, 50/60 Hz

INSULATION CLASS

Reinforced insulation II

PRODUCT CLASSIFICATION

Class I Equipment

APPLIED PARTS

Type B

MOISTURE RESISTANCE

IPX0

CONFORMITY

IEC 60601-1:2005 , IEC 60601-1:2005/AMD1:2012

EN 60601-1-2:2015 , IEC 60601-1-6:2010

IEC 60601-1-6:2010/AMD1:2013 , ISO 10993-10:2010

ISO 10993-5:2009

FRAME COLOUR

RAL 7047 + RAL 7011

FEEDER CABLE

3m, White

Operation

TwinLift® arm supports: stepless and simultaneously adjustable table with gas spring. No collision with the therapist.

Head section with 2 gas springs.

Fully integrated peripheral switch, easy access from all sides of the table.

4 wheels turning 360°. Fully integrated system underneath the base frame. 2 levers lift the table on its 4 wheels.

Electrically adjustable middle section. Switches on both sides.

Foot section with 1 gas spring.

Safety

Safety switch with key (power off).

Double tip system with automatic standby system (5 sec), for all motors.

Upholstery

THICKNESS

5cm

DENSITY

40kg/m³

Breathing hole and plug.

Seamless upholstery with round edges.

Coating: 100% vinyl. Against germs and bacteria (ISO 22196:2011).

Superior abrasion resistance: >150K cycles.

Flame retardancy: BS 5852

● Colour: Graphite

Warranty

3 years on table and upholstery.

Accessories

3 models of stools, 2 colours



Paper roll holder



Bed covers, 2 colours

