
your wellness company

EN

Instructions Manual


Electric Massage Bed

3381A5+.4.A39.HT

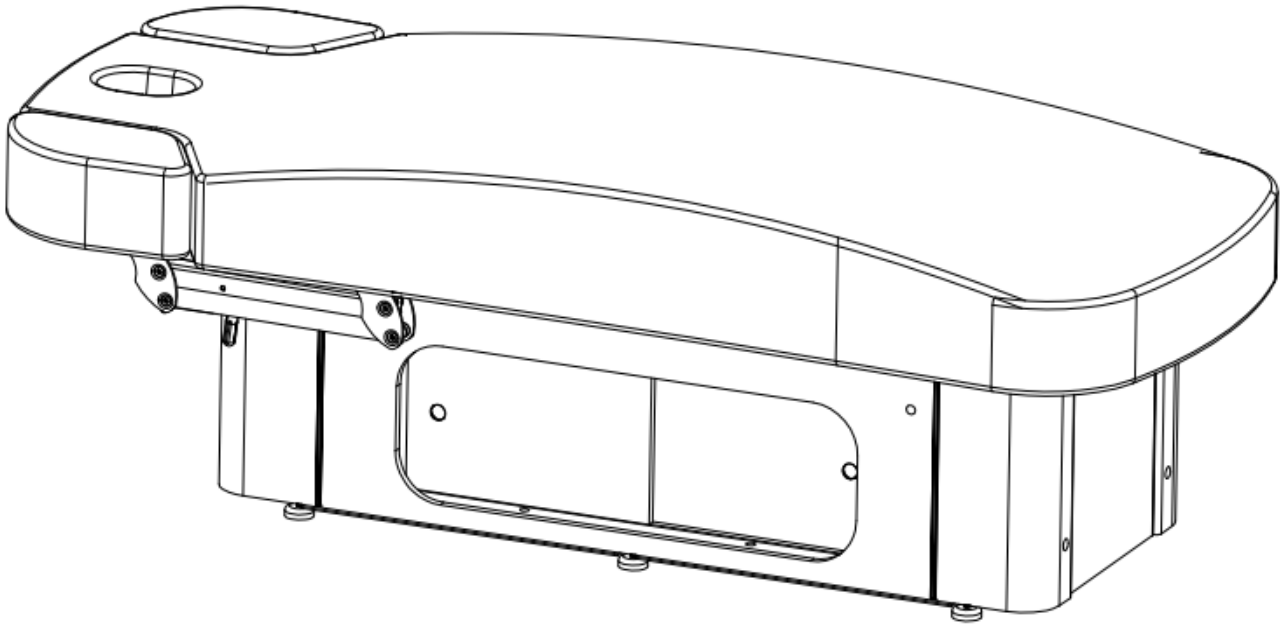

weelko your wellness company


● Technical data：

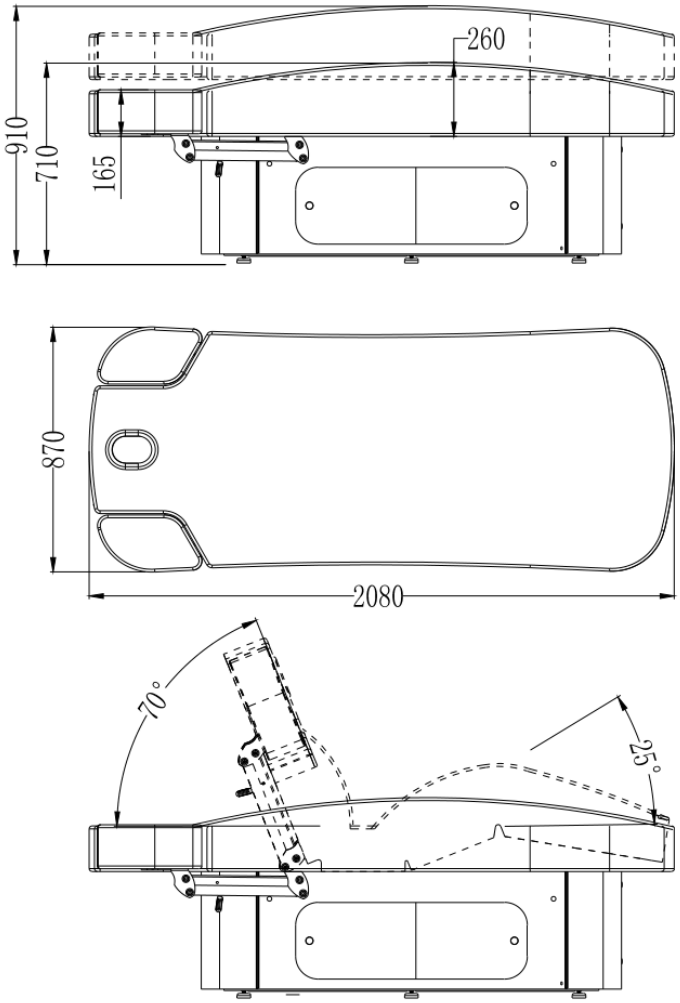

Size	2080*870*710mm
Min	710mm
Max	910mm
Net weight	158 kg
capacity	200kg
Filling materials	sponge
leather	PU
Input voltage	AC220~240V,50/60Hz
Output voltage	DC 24V
Power rate	160W
Relative Humidity	45-85%
Environment temperature	-5ºC to +50ºC
Insulation class:	Class II

● Use specification

●hand control as below show：

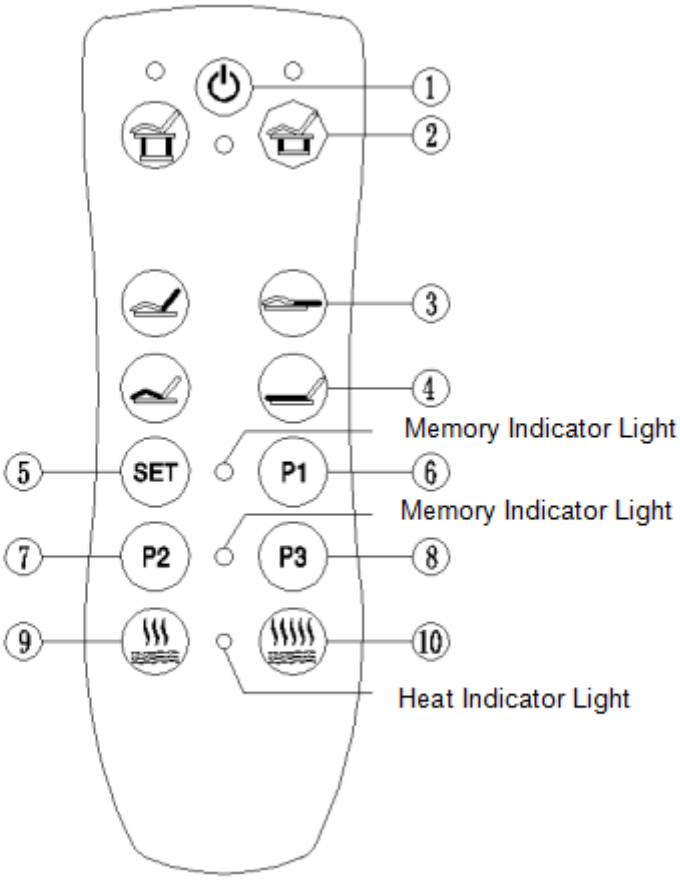

①：turn on/off hand control, press ,turn on hand control;press again , turn off hand control,bed back to original position,press again ,bed stop recover.

②：press button,bed rise up;press ,bed descend.

③：press or to adjust backrest incline angle.

④：press or to adjust footrest angle.

⑤⑥⑦⑧： for memory function,operate process:first set up position you want,then long press start memory function,then press or or memory condition,can set 3 kinds different memory state.


⑨ press ,green light up,then low heat setting. Press this button again to turn off the heat.

⑩:press ,red light up, then high heat setting. Press this button again to turn off the heat;

●Use method:


- **High adjustment：**

Turn on hand control，press  bed rise up;press  ，bed descend

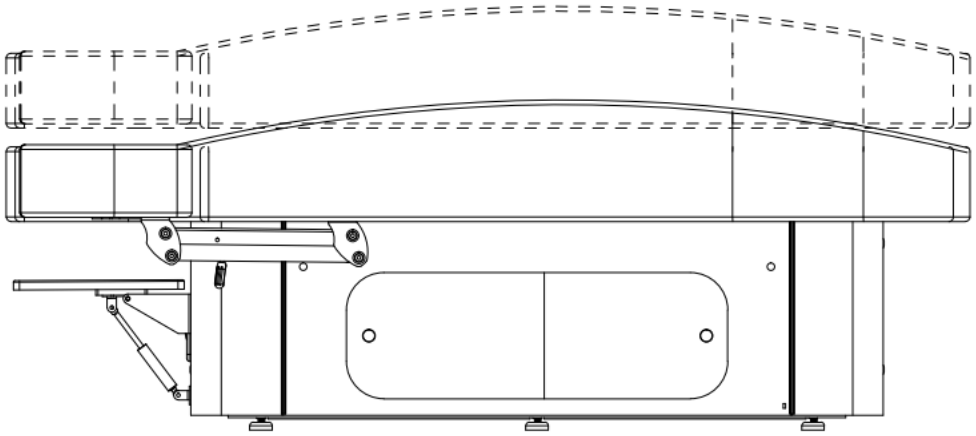


- **Backrest adjustment:**

press  ,backrest incline angle rise up;press  , reduce backrest incline angle.

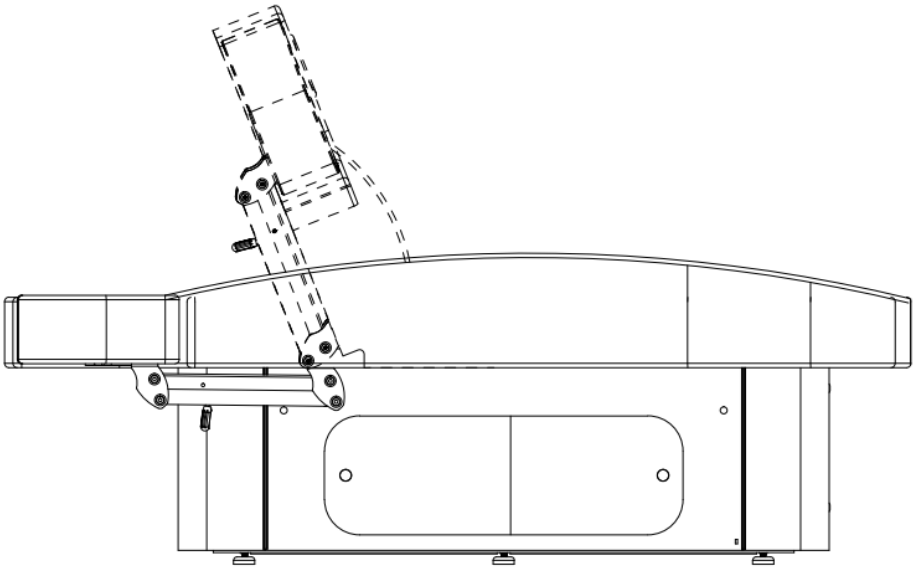


- **Footrest adjustment:**

press  ,footrest incline angle rise up;press  , reduce footrest incline angle.

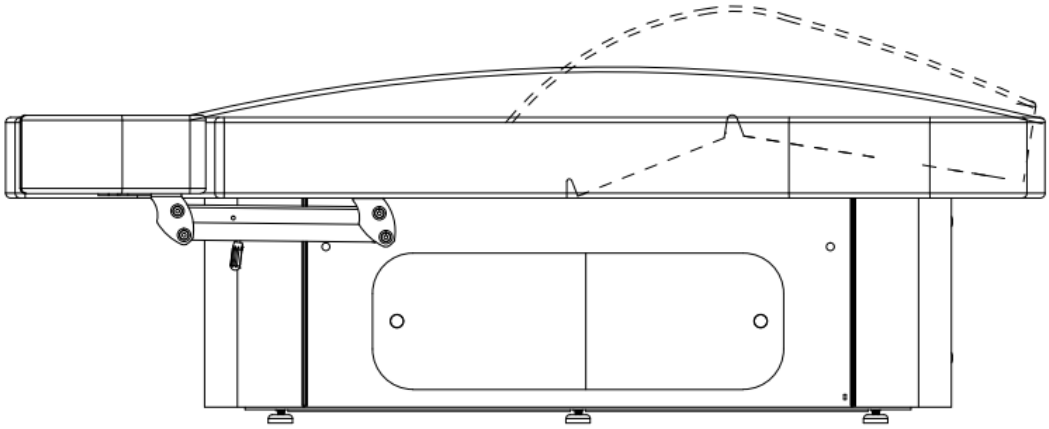


- **Armrest adjustment:**

Press down the gas lift in the arrow direction and not release the hand,meanwhile slightly press down the armrest can adjust its angle,otherwise it will recover,as picture:

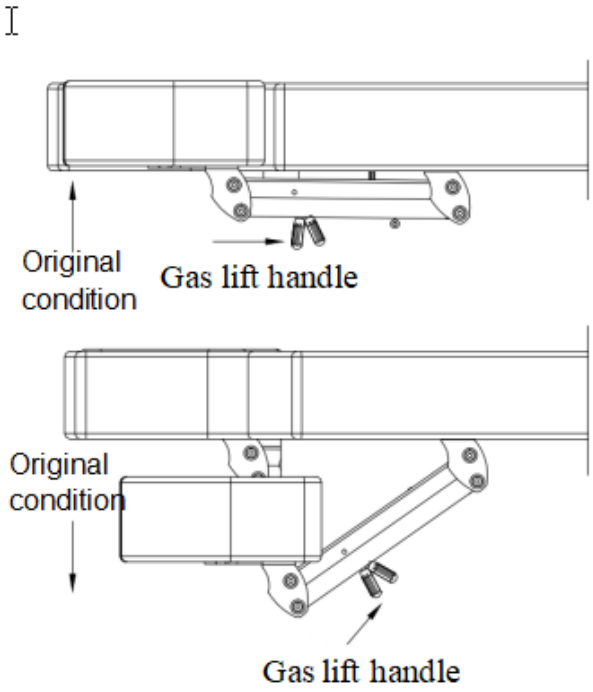


- **Power socket position as picture：**

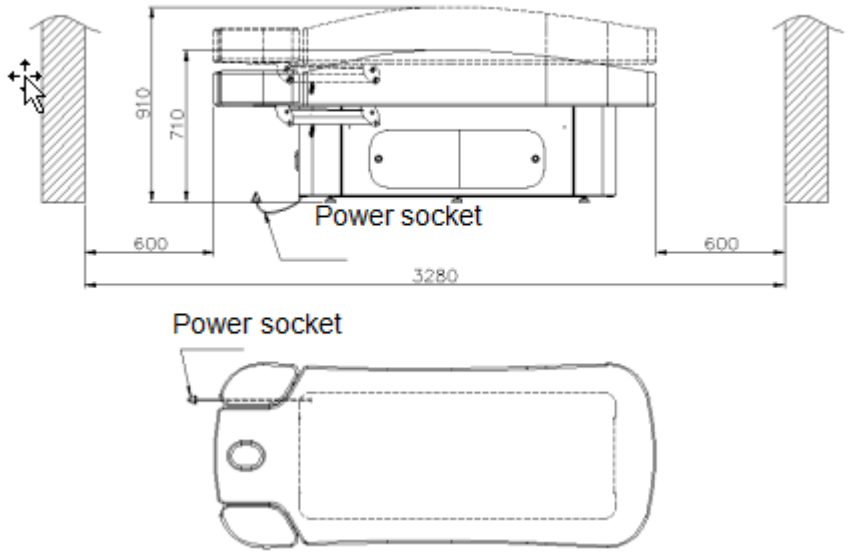

- **Rubber foot adjustment**:

Rotate and adjust height of rubber foot can solve some uneven ground condition,after adjust the height,tighten and fix it upward with the nut,as picture show:

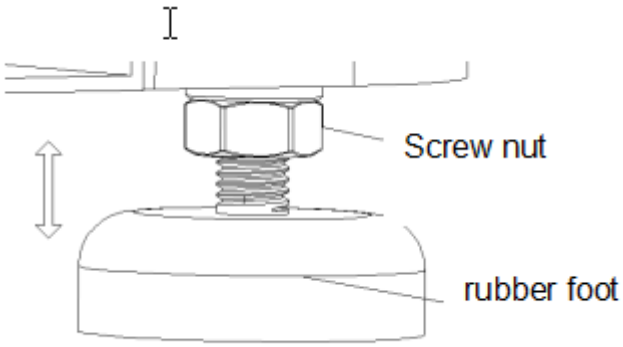


Safety instructions

1. Before connection, operation and adjust the bed, please read and the user manual carefully.
2. This electric massage bed uses a three-wire power cable. Meanwhile it should be inserted into the three-hole outlet where there is a ground electrode. And it should be assured that it can be connected to the ground electrode smoothly so that it can prevent

people from getting electric shock while functioning normally.

3. All the plugs, buttons and other components connected to the power cable must not dip in the water or other liquid.
4. It is forbidden to put your hands, feet, head or other part of the body into the gap as below position ①②③④⑤⑥ while massage chair is running during use function.
5. It is prohibited to use when plugs, buttons and other components connected to the power cable are broken.
6. It should be noticed that the frequency is 6min/h when the motor of this massage chair is used.
7. The maintenance should not be dealt with without official training.

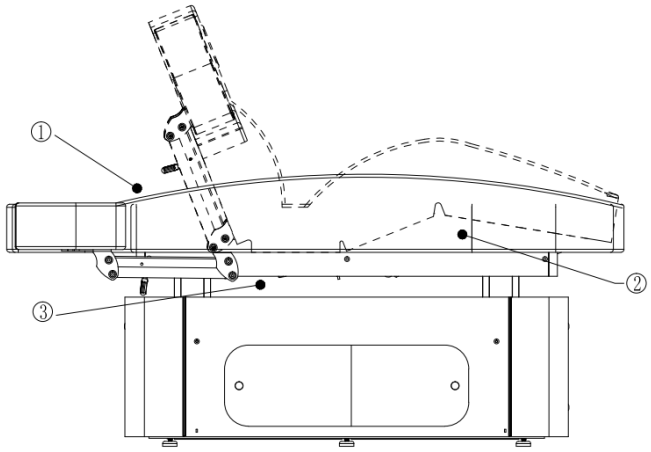

● Attentions

1. Someone with osteoporosis or heart problem should not use this massage chair.
2. Women being pregnant or in menstruation should not use this massage chair.
3. Someone inured or with disabilities should not use this massage chair.
4. Children under 14 years old without any supervision and someone unconscious should not use this massage chair.
5. Breakages of the power cable and plug should be eliminated before it's normally used. Breakages should be dealt with by someone professionals or service providers.
6. The voltage should accord with the safety voltage before it's officially used. And the wrong voltage may lead to the breakdown of the product.
7. Wet hand is not allowed to touch power to avoid shock.
8. The product should not plug in before it's already installed.
9. The power cable should be put away so that pedestrian will not trip up and fall.
10. The appearance of the product should cleaned by the use of the soft towel with diluted neutral detergent.
11. It should be unplug when it's not used.
12. Do not dismount this product without any authorization. Please inform the official service providers to deal with the Maintenance.

● Maintenance

1. Daily cleaning

You can wipe out the dust by using soft dry towel.

2. Eliminating the stubborn dirt
   As we all know, it is hard to eliminate the stubborn dirt by using normal dry towel. In this case, you can use soft towel with diluted neutral detergent to clean it first. And then you can use dry towel to scrub.
3. It's prohibited to use benzene, diluent, gasoline or other solvent.
   These solvents may damage the leather or it may cause the corrosion of the products' appearance.
4. Storage and operating environment
   Don't put the product under the strong sunlight and moisture environment. Otherwise it may cause the damages of the product.
5. It is allowed to use this product under the temperature from -5℃ to 50℃ and the humidity from 45% to 85%.

Solutions to possible problems：

If there is something wrong with the product, please check these steps:

Issues	Possible cause	Solution
Press the button on the remote but without any response.	1.1. The function of control button has reached to maximum. 2.Check if the power plug is connected 3.Check if each connecting plug of the control box is connected	1.Try to press other control button 2.Disconnect the power plug and connect it again. 3.Place the bed upside down and you can find the control box. Disconnect the plug and connect it again
Noises and shaking while going up and down	Screw loosen	Tighten all the screws
The light is still off although the switch is on	The fuse has burned out.	Replace the fuse.

Remarks: It will be not informed if the improvements of the product do not influence appearance and function.

Imported by
WEELKO BARCELONA SL
Pol. Ind. La Valldan
Camí de Garreta, 92
08600 Berga
Barcelona - Spain T.
+34 93 824 90 20
E. info@weelko.com